



RD3U-F26170Wxx Series

3U 26" Rack Mount Triple LCD w/ Keyboard Drawer



The latest addition to our diverse line of cutting edge products is our new RD3U-F26170Wxx Series 3U Triple (or Dual) display drawer with integrated Keyboard drawer.

For this new solution we've taken the best of what our PDD3x3 and RDKB products had to offer and re-imagined it into a robust new platform. To that end the unit has a reinforced frame and two sets of newly developed rugged friction slides making it ideally suited for Mobile environments. In addition, the Rear I/O Panel includes customizable options such as a variety of discrete video inputs, an optional USB Hub, and various KVM options as well.

With a dizzying array of customizable features DIT continues to demonstrate why our products are the most configurable on the market.

WWW.DITHD.COM

ENCLOSURE

- 3U 26" Deep 3x LCD w/ Keyboard Drawer
- All Aluminum Construction
- Integrated Struts for Support
- Independent Drawer Operation w/Cable Guides
- Variety of Front Face Options & Handles
- Two Sets of Independent Rugged Friction Slides
- Mounts in Racks 26-36" Deep
- Variety of Back Panel Features
- 24VDC/XLR Input w/AC Transformer
- Dual Screen Version Optional
- Available with Dual or Triple View KVMs
- Dimensions 5.25"H (3U) x 19"W x 26"D

DISPLAY

(Specs are per display)

- 3x17" Wide Screen FHD Displays
- 1920x1200 WUXGA Resolution
- Viewing Angles 80L/70R/60U/70D
- 340 NITS Brightness (CCFL)
- Contrast Ratio 450:1
- Response Time 30ms
- Inputs VGA, DVI-D, S-Vid, CVS, YPbPr
- Optional HDMI, HD/SD-SDI, 3G
- Glare and Hard Coating 2H, Low Reflection
- Vibration (Sine Wave) 14.7m/s²
5-50Hz: 9Hz/Min.
- Duration: X,Y,Z, 20 Min/EA
- Shock 120G, 3ms Sine Wave
X,Y,Z, 1x/EA Axis
- Operating Altitude 70kPa, 48Hrs
- Operating Temperature 0 to 45c
- Storage Altitude 26kPa, 48Hrs
- Storage Temperature -30 to 65c

KEYBOARD

(USB or PS2)

- 103 Key Industrial Grade Keyboard
- Mechanical Keys w/ High Precision Key Action
- Long Lasting Construction w/ 20 Million Cycles
- 12 Function Keys
- Programmable Keys
- Additional Keyboards Available on request
- Vibration IEC 60068-2-6 Compliant
- Shock IEC 60068-2-27 Compliant
- Operating Temperature 0c to 60c
- Storage Temperature -40 to 65c

MOUSE

(USB or PS2)

- Full Size Optical Scroll Mouse
- 800 DPI Resolution w/ 3 Integrated Buttons
- Flexible design for Left or Right Handed Users
- Operating Temperature 0c to 50c
- Storage Temperature -20 to 60c

Further Customization Available

Display Integration Technologies

1330 Specialty Dr, Suite A, Vista, CA, 92081
Phone 760.599.9225
Fax 760.454.0328



RD3U-F26 170Wxx Series


Keyboard & Mouse





RD3U-F26170Wxx Series

Example Back Panel Layout

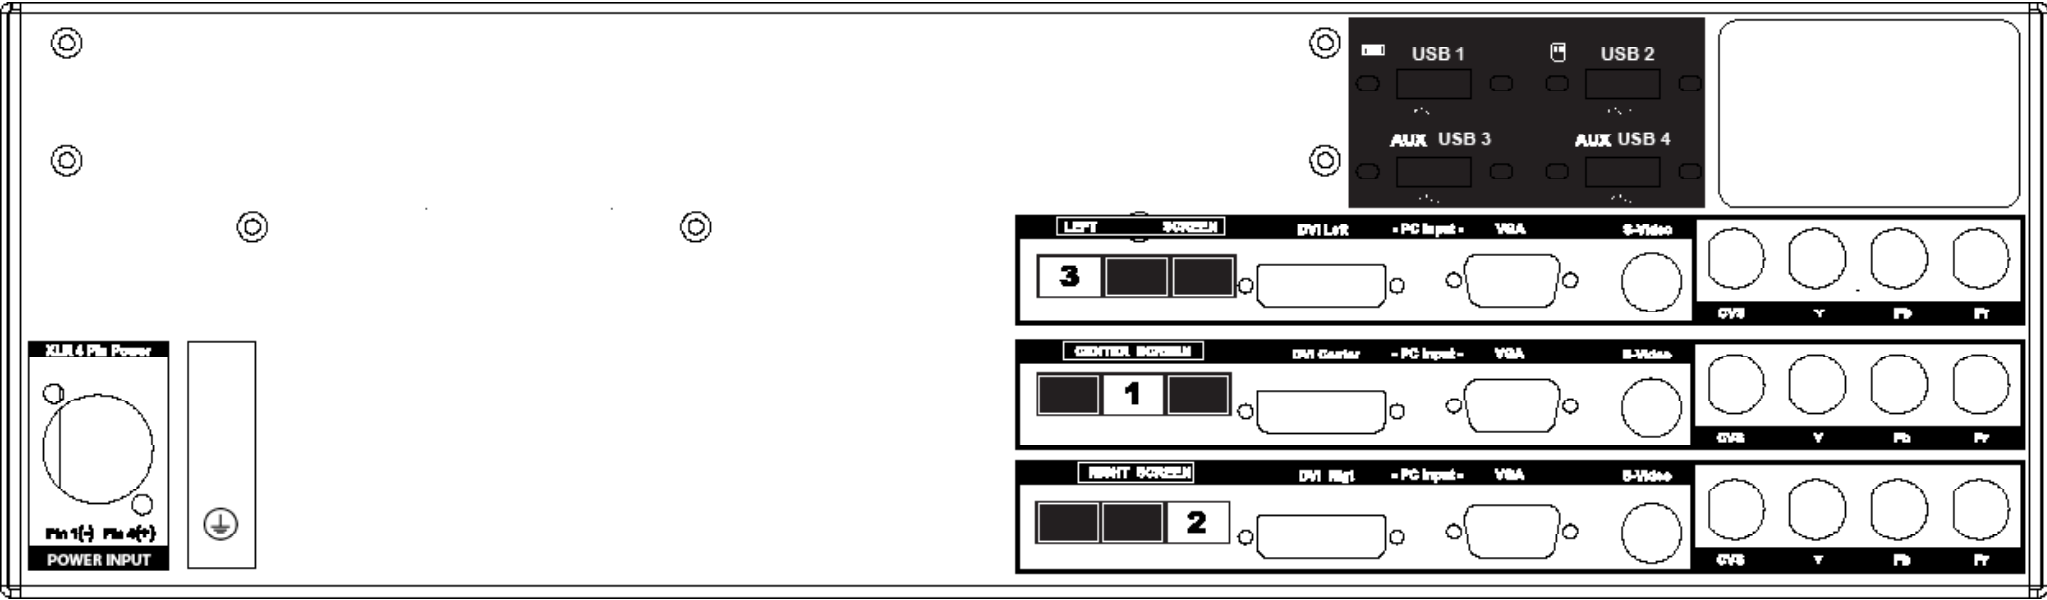

Custom Options Available. Actual back panel layout may vary.