

PPC-IN10L1

Industrial Panel PC



Features

- Fanless High Brightness Panel PC
- Intel® Quad Core E3845 CPU
- 10" 1000nits Sunlight Readable LCD
- Wide Temp. -20~65°C Operation Capability
- Special Thermal Module & MB Pre-Heating Design
- Front Full Flat Resistive Touch
- IP66 Water/Dust Proof Front Bezel
- CE, FCC, VCCI Class B

Specification


Product		PPC-IN10L1
Main System	CPU	Intel® Atom™ Processor E3845, Quad-core processor
	Graphic	Intel® integrated HD Graphics
	Memory	Wide temp, dual Channel, two DDR3L-1333 SODIMM socket support up to 8GB
	OS Support	Win 7, Win 7pro, Win 8, Win 8 industrial, Win10
Display	Size	10" 4:3
	Resolution (pixel)	800x600 SVGA
	Number of Colors	16.2M colors
	View Angle (H/V)	130(H) / 120(V)
	Brightness(cd/m², nit)	1000 nits
	Contrast Ratio	400:1 (Typ)
Touch Panel	Type	Full flat resistive touch panel
	Light Transmission	80 ± 5%
	Hardness	4H
	Lifetime	35M times
Storage & Expansion	Storage	WT 128GB 2.5" SATA SSD 3MG2-P x 1
	Expansion	Mini PCIe x 2
I/O Ports	USB	USB 3.0 x 1, USB 2.0 x 3
	COM	2 X RS-232, 1 X RS-232/422/485
	LAN	2 x RJ-45
	Audio/ Video	3.5mm phone jack connector x 2 (Line-out, Mic-in)/ DVI-I x 1
	Control Keys	Rear bottom: Power on /off
Power	Power input	DC-in x 1 , 7 ~ 32V
	Power adapter	Universal 90 ~264V AC in, 12V DC out
Environmental	Temperature	Operating Temperature: 12V DC Input -20~65°C (IEC60068-2-56 air flow cooling) Storage Temperature: -20~65°C
	Humidity	Operating & Storage: 10 ~ 90%, non-condensing
	Water/Dust resistance	IP66 at front
Mechanical Characteristics	Housing	Front bezel is Aluminum, others are SECC with black coating
	Dimensions (Net: mm)	313 (H) x 240 (V) x 72 (T)
	Weights (Net: kg))	3.9 kg
	Mounting	Panel mount, VESA (75x75)
Certification	CE/ FCC/ VCCI Class B, Canada ICES-003	



1357 Rocky Point Dr., Oceanside CA 92056
760.599.9225 | www.DITHD.com | Cage Code 787R6 | sales@DITHD.com

Dimensions

Units (mm)

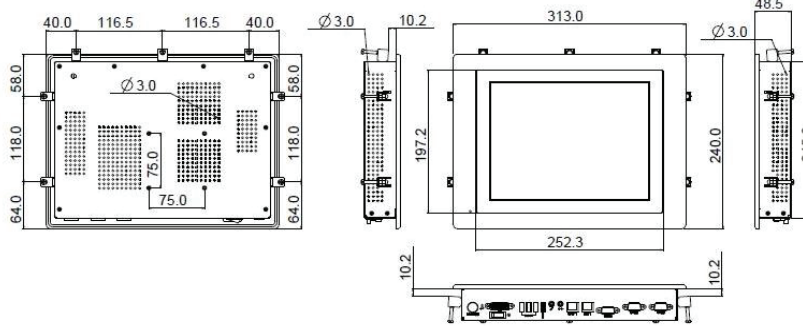


Major Options

Add On Parts	1. Wireless or Wireless + BT kit , 2. Change to P-cap touch, 3. Stainless front bezel, 4. Silver front bezel, 5. 2.5" SSD, 6. TPM
Add On Cable	1.DC input power plug (black, 1.22m length)
Customized	1. Open frame housing, 2. Sunlight readable optical bonding, 3. LCD auto dimming, 4. LCD super dimming (Low brightness), 5. Storage door solution, 6. Chassis type housing

Order Information

Item	Touch	Description
PPC-IN10L1	Full flat Resis.touch	10" Atom E3845/ Wide temp. 2G RAM/ 128G SSD

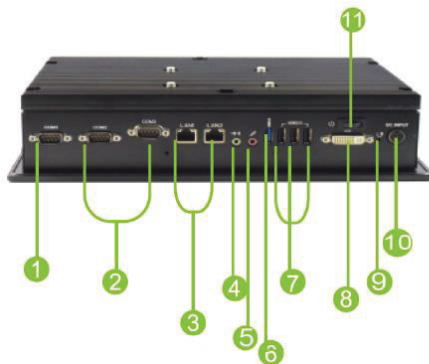

- ① RS232/422/485
- ② RS232 x 2
- ③ LAN x 2
- ④ Line out
- ⑤ Microphone-in
- ⑥ USB 3.0
- ⑦ USB 2.0 x 3
- ⑧ DVI-I output
- ⑨ Reset
- ⑩ DC-in
- ⑪ Power on/off



Display Integration Technologies | The Worlds Most Configurable Monitors
1357 Rocky Point Drive, Oceanside CA 92056 | 760.599.9225 | www.DITHD.com



20241123