


PDD3

F-CLASS



WWW.DITHD.COM

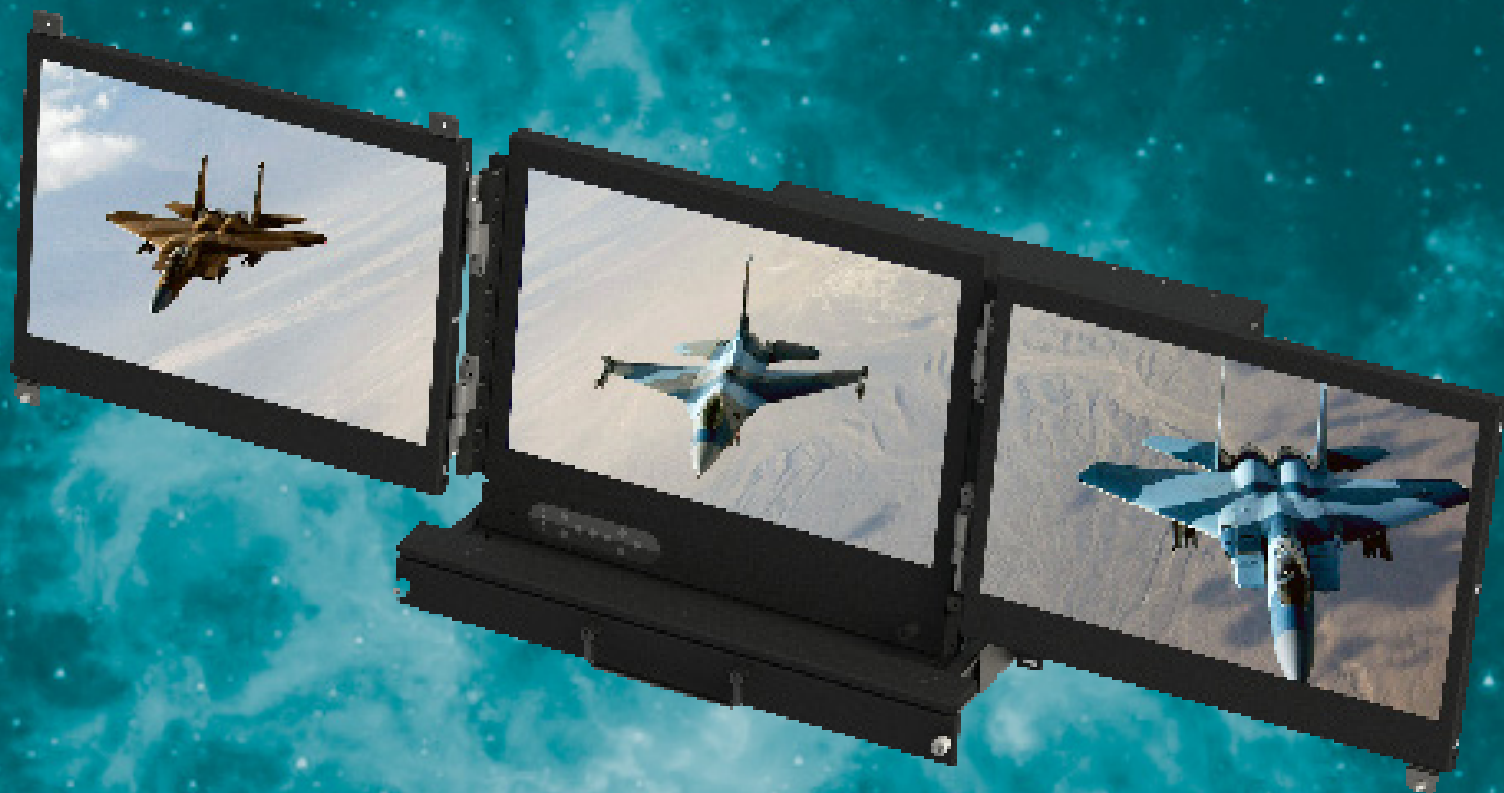

SERIES

PDD3 - F20xxx

The PDD3-F20 represents our next generation Hydra platform based on a short depth 20" frame and wide LCDs. It utilizes the latest technology including LED backlit displays, our new torque hinge design, Innovative OSD Control, and improved rugged design. The PDD3-F20 is available in Dual or Triple screen configurations.

DIT: THE INDUSTRY LEADER IN MULTIPLE DISPLAY MOUNT SOLUTIONS



FEATURES

- A** LED Backlit LCDs
- B** Unified OSD Buttons
- C** Front Face
- D** Gas Support Struts
- E** 4 Point Lock Downs
- F** Input Options
- G** Power Connector
- H** Transit Case Arms
- I** Grounding Stud

WHY CHOOSE THE PDD3-F20?

- Rugged All Aluminum Construction
- Customizable Modular Design
- Innovative Unified OSD Control
- Multiple Display Options
- Protective Cage Cable Guide
- Integrated Friction Slide Rails
- Adjustable/Telescoping Rear Arms
- Mounts in 19" Racks from 20-29"

*Additional mounting options available

VIDEO CONTROLLERS

- **V252 Controller NEW! Low Cost Entry Level**
Max Resolution: 1920 x 1200
Inputs Available:
VGA, DVI
- **V144a Controller**
Max Resolution: 1920 x 1200
Standard Inputs Available:
VGA, DVI-D, CVS, S-Video, YPbPr, and Audio
- **V17Aa Controller**
Max Resolution: 1920 x 1200
Inputs Available:
VGA, HDMI, Display Port (Audio HDMI only)
- **V237 Controller**
Max Resolution: 1920 x 1200
Inputs Available:
VGA, DVI-D AND HDMI
- **V238 Controller**
Max Resolution: 1920 x 1200
Inputs Available:
VGA, DVI-D or HDMI, 3G-SDI with loop out

LCD DETAILS

NEW!

- 173W FHD 1920 x 1080 (Max Res)**
17.3" Wide LED Backlit LCD w/ Anti-Glare
 • Viewing Angles: 80L/80R/60U/80D
 • Contrast Ratio: 600:1
 • Brightness: 400 NITS
 • Response Time Tr/Td: 37/3
 • Operational Temp: 0-70c
 • Storage Temp: -30-75c

LEGACY

- 172W WUXGA 1920 x 1200 (Max Res)**
17.2" Wide LED Backlit LCD w/ Anti-Glare
 • Viewing Angles: 70L/70R/60U/60D
 • Contrast Ratio: 800:1
 • Brightness: 275 NITS
 • Response Time: 16ms
 • Operational Temp: 0-50c
 • Storage Temp: -20-60c

FRONT FACE OPTIONS

- **D8:** Thumbscrew with 5" Collapsible Handle
- **Da7:** Thumbscrew w/ Flush Collapsible Handle & Speakers
- **Da6:** Thumbscrew w/ 7.5" Pull Handle & Speakers

Additional Options Available

DISPLAY OPTIONS

Dual - Right Open (Default)



Dual - Left Open



Triple



LCD Enhancement Options:

- Anti-Reflective Lens
- ITO Lens
- Resistive Touch
- Projected Capacitive Touch
- Optically Bonded

SPECIFICATIONS

- Dimensions: 3.5" (2U) x 19"W x 20"D
- Weight: 48 LBs
- Power Consumption: 75W

Values are approximate and vary based on configuration



SERIES:	DISPLAY:	CONTROLLER:	FRONT FACE:
PDD3-F20173W	x 3	V252	D8
172W, 173W	2, 2L, 3	V252, V237, V238 V144a, V17Aa	D (Face) 1-8 (Handles)

► Custom Options Available On All DIT Models

DIT: Display Integration Technologies | The Worlds Most Configureable Monitors
 1357 Rocky Point Drive, Oceanside CA 92056 | 760.599.9225 | www.DITHD.com

