MMR-U238xN

U-CLASS







MMR-U238xN

When resolution is everything, we don't compromise. Our rugged MMR 4k Panels let you take your desktop with you. With single, dual, and triple montior configurations, the MMR-U (Ultra Series) sets the new standard in rugged Displays and Monitor Systems. It features native 4k panels that can be high-brighted to over 1000 NITS, optically bonded, and configured with P-CAP Touchscreens. This onthe-go monitoring solution is a must for on-location go-getters. With V-Mount and Pole Mount battery solutions, and customizable I/O options including SDI, HDMI, Mini Display Port, built in kickstand, lightstand mounts, and dual battery solutions is only a small part of the expandable accessories and options available in this unit. Whether you're shooting your next feature film in Alaska, collecting drone footage in the Amazon Jungle, or mapping the Gobi Desert and can't wait to get to basecamp or your editing studio to see your results in true 4k. Our MMR-U will become your go-to tool on every job.

DITHD: THE INDUSTRY LEADER IN MULTI-HEAD DISPLAY SOLUTIONS





Hydra Field Monitors



FEATURES

- LED Back Lit LCD With Lens A Enhancement
- B Comes with V-Mount and Pole Mount Battery Plates
- C Unified OSD Button Board
- D I/O Ports Splash and Dust
- E Integraded Kick Stand
- F Integraded Audio Speakers
- G Oversized Handle
- Bolt On Lightstand Mount
- I Heavey Duty Field Replaceable Torque Hinges

Why Choose The MMR-U?

- Multi-Head HYDRA Design
- Rugged All Aluminum Welded Construction
- Innovative Unified OSD Control
- Comes with both V-Mount and Pole **Mount Battery cradles**
- True 4K Panel Resolution
- 4P XLR 12VDC Power Inlet Port
- Comes with Splash Proof and Dust **Proof Port Covers**
- Comes with Storm Style Carrying Case

VIDEO CONTROLLERS

- V34X Controller
 - -Broadcast Quality Embeded Controller
 - -Max Resolution: 4096 x 2160
 - -Avalible Inputs: HDMI 2.0, HDMI 1.4, Dispaly Port 1.2, 6Ġ SDI
 - -Full Frame Memory Buffer, Eithernet and RS-232 Comand and Control
- V35X Controller
 - -Mid Grade Embeded Controller, Max Resolution 4096 x 2160
 - -Avalible Inputs: VGA, HDMI 2.0, Display Port 1.2a, 6G SDI, Audio Input

LCD OPTIONS (MAX RES)

UHD 3840 x 2160 (Max Res)

23.8" Ultra HD Backlit LCD w/ Anti-Glare

- Viewing Angles: 89L/89R/89U/89D
- Contrast Ratio: 1000:1
- Brightness: 300 NITS Response Time: 14ms
- Surface Finish: Anti Glare with arcylic Lens
- Colors: 1.07B

238HB **UHD 3840 x 2160** (Max Res)

23.8" Ultra HD Backlit LCD w/ Anti-Glare

- Viewing Angles: 89L/89R/89U/89D
- Contrast Ratio: 1000:1 • Brightness: 1000 NITS
- Response Time: 14ms
- Surface Finish: Anti Glare with arcylic Lens
- Colors: 1.07B

CONFIGURATIONS

Single (x1)



Dual (x2)



Triple (x3)



OPTIONS

Enhancement Options:

Anti-Reflective Lens P-CAP Touch Conformal Coated Electronics Optical Bodel Cover Glass

Additional Controller Options Available



SERIES DISPLAY **MMR-U**

SCREEN Count **x2** 238HB, 238M

CUSTOM

REV XXXXX

x1, x3

Custom Options Available On All DIT Models

SPECIFICATIONS

Dimensions: TBD

Weight: TBD


Power Consumption: TBD

Values are approximate and vary based on configuration



DIT: Display Integration Technologies | The Worlds Most Configurable Monitors 1357 Rocky Point Dr. Oceanside CA, 92056 | 760.599.9225 | www.DITHD.com



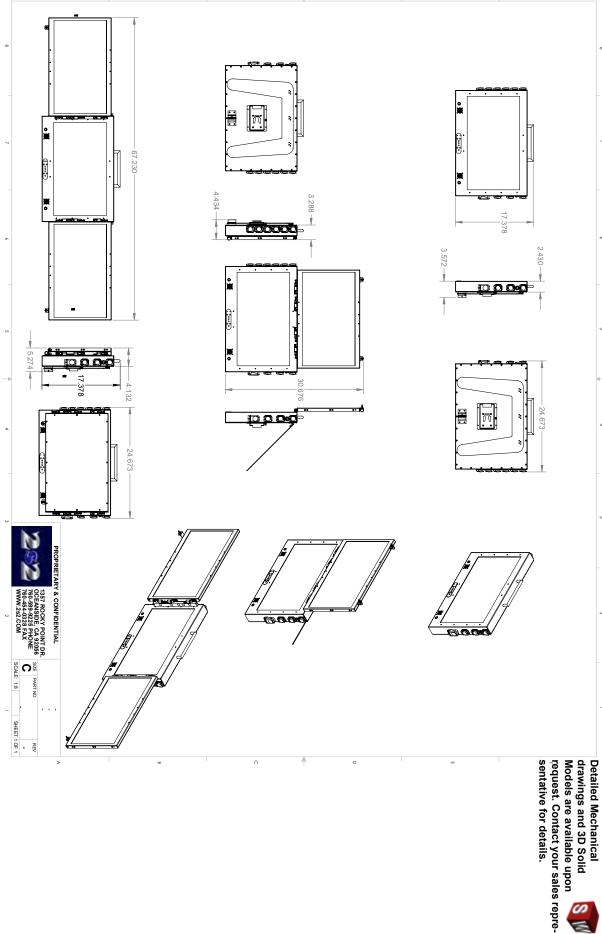



HD Display Integration Technologies